

# VIKING ACCESS SYSTEMS

## H-10 SLIDE GATE OPERATOR

COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

2200 lbs/75'

### Normal Operating Speed

12" Per Second

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

100 Continuous Cycles

### Warranty

5 Year

## L-3 SLIDE GATE OPERATOR

COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

1600 lbs/60'

### Normal Operating Speed

12" Per Second

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup


100 Continuous Cycles

### Warranty

5 Year

## K-2 SLIDE GATE OPERATOR

RESIDENTIAL

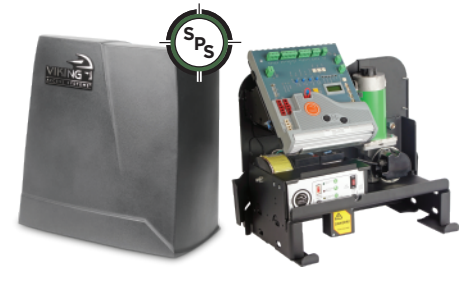

### Max Gate Capacity

700 lbs/30'

### Normal Operating Speed

12" Per Second

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

100 Continuous Cycles

### Warranty

5 Year

## I-770 UNDERGROUND GATE OPERATOR

COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

650 lbs/12'

### Normal Operating Speed

13 - 15 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

250 Continuous Cycles

### Warranty

3 Year

## VIKING MONITOR



### WiFi Connectivity Range

Up to 100'

### Plug & Play

E-4 & VFlex Control Board

### Compatibility

Android & Apple iOS

### Frequency

2.40 GHZ

### Warranty

1 Year

# VIKING ACCESS SYSTEMS

## T-21 SWING GATE OPERATOR COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

2000 lbs/12' or 1200 lbs/20'

### Normal Operating Speed

13 - 16 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

400 Continuous Cycles

### Warranty

5 Year

## F-1 SWING GATE OPERATOR COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

1500 lbs/12' or 1000 lbs/16'

### Normal Operating Speed

13 - 16 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

400 Continuous Cycles

### Warranty

5 Year

## R-6 SWING GATE OPERATOR RESIDENTIAL



### Max Gate Capacity

700 lbs/14'

### Normal Operating Speed

13 - 16 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input


### Battery Backup

400 Continuous Cycles

### Warranty

5 Year

## G-5 SWING GATE OPERATOR COMMERCIAL / RESIDENTIAL

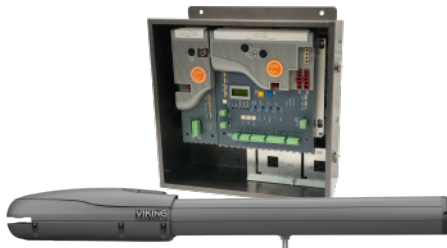

### Max Gate Capacity

2000 lbs/10' or 800 lbs/18'

### Normal Operating Speed

15 - 18 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input


### Battery Backup

400 Continuous Cycles

### Warranty

3 Year

## E-4 SWING GATE OPERATOR RESIDENTIAL

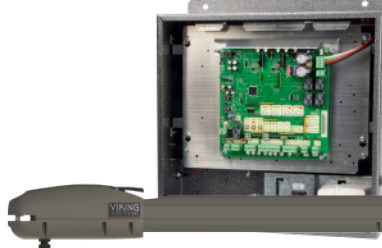

### Max Gate Capacity

850 lbs/ 10' or 550 lbs/16'

### Normal Operating Speed

12 - 16 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

400 Continuous Cycles

### Warranty

3 Year

## X-390 SWING GATE OPERATOR COMMERCIAL / RESIDENTIAL



### Max Gate Capacity

600 lbs/14'

### Normal Operating Speed

10 - 13 Seconds per 90°

### UL325 Monitored Inputs

2 inputs, 4 devices per input

### Battery Backup

400 Continuous Cycles

### Warranty

3 Year