

# XR2C Radio Receiver

## QUICK INSTALLATION GUIDE

### STEP 1




**Wire the Receiver** to the Control Board.

### STEP 2

**Press the “SW1” button** for 1 second. The corresponding LED (DL1) will flash for 5 seconds.

### STEP 3 - within 5 seconds

**Press and hold the desired Transmitter button** until the receiver’s DL1 LED illuminates solid for 1 second, indicating that the programming has been completed.

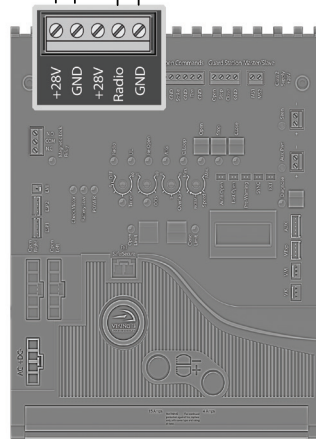

FA-XR2C	“Radio Station”
+	+28V
-	GND
COM	GND
N.O.	Radio

*Wiring Table and Diagram are provided for reference and applies to all Viking Operator Models.*

### To Erase all Stored Codes:

**Press the “SW1” button** for 10 seconds. The DL1 LED will flash, illuminate steady, then turn off indicating the codes have been erased.